
Overview

HP Integrity BL860c i4 Server Blade

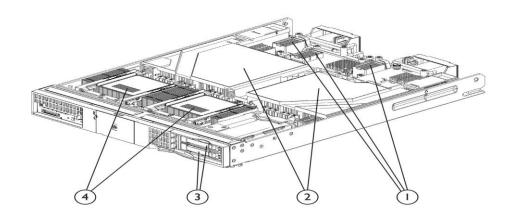

- 1. 3 x PCIe Mezzanine Slots
- 2. 24 x DDR3 DIMM Slots

- 3. 2 x SFF SAS HDDs, hot-swap bays
- 4. Two Intel® Itanium® processor 9500 series sockets

What's New

- Intel® Itanium® processor 9500 series 8-core and 4-core processors
- 33% increase in memory bandwidth via 6.4GT/s Quick Path Interconnect (QPI) links
- Faster (1067 MT/s) and Low Voltage PC3L-10600 Registered CAS 9 Memory DIMMs
- Dynamic CKE, for economical use of power resources
- Four integrated 10Gb Converged Network Controllers in an FCoE LAN on Motherboard (LOM) implementation
- Embedded SAS read only 512MB cache

At A Glance

This document covers the HP Integrity BL860c i4 server blade only. For more information on HP BladeSystem c-Class Enclosures and HP BladeSystem c-Class Interconnect and Mezzanine Components, please see the following:

- HP BladeSystem c3000 Enclosure QuickSpecs:
 - http://h18000.www1.hp.com/products/quickspecs/12790_div/12790_div.html
- HP BladeSystem c7000 Enclosure QuickSpecs:
 Here (1/1/10000 and 1/10000)
 - http://h18000.www1.hp.com/products/quickspecs/12810_div/12810_div.html
- HP BladeSystem c-Class Interconnect and Mezzanine Components:
 http://h18004.www1.hp.com/products/blades/components/c-class-interconnects.html
 http://h18004.www1.hp.com/products/blades/components/c-class-adapters.html

The HP Integrity BL860c i4 delivers the performance, reliability, and availability on HP's 64-bit operating system HP-UX 11i v3 for the ultimate in scalability and flexibility in deployment. To further enrich your cost-efficient, consolidated Integrity blade infrastructure, Virtual Server OE (VSE-OE) can help with solution components such as HP-UX Virtual Partitions (vPars) v6.1, HP Integrity Virtual Machines (Integrity VM), HP Capacity Advisor, HP Global Workload Manager, and automation through HP Infrastructure Orchestration. Additionally, High Availability OE (HA-OE) provides high availability via the HP Serviceguard



Overview

clustering technology and Data Center OE (DC-OE) brings the best of the virtualization capabilities along with high availability together in one integrated OE

HP Integrity BL860c i4 server blade includes:

Processor:

o Up to two Intel[®] Itanium[®] 9500 Series processors

Memory:

Up to 384 GB of memory. Supporting (24) DDR3 registered memory modules (R-DIMMs)

• Storage Controller:

- o Embedded HP Smart Array p410i SAS Controller
- RAID 1, RAID 0, and HBA mode configuration options
- Embedded SAS read only 512MB cache

• Internal Drive Support:

Supports up to (2) two small form factor (SFF) SAS hot plug hard drives

• Network Controller:

Four (4) integrated HP NC553i 10Gb FlexFabric adapter ports supporting 10Gb/1Gb autosensing Ethernet,
 FCOE, Flex-10, and TCP/IP offload engine

NOTE: FlexFabric capability requires OS drivers and the use of an HP Virtual Connect FlexFabric module. Learn more at: www.hp.com/go/virtualconnect

NOTE: BL8x0c i4 server blades require Virtual Connect 3.70 or later when used in Virtual Connect configurations

Plus one (1) additional 10/100 NIC dedicated to Integrity iLO 3 Management

Mezzanine Support:

- Three (3) additional I/O expansion slots via mezzanine cards.
- Supports up to (3) mezzanine cards
 - HP NC553m Dual Port 10Gb FlexFabric Adapter
 - HP NC551m Dual Port 10Gb FlexFabric Adapter
 - HP NC552m 10Gb 2-port Flex-10 Ethernet Adapter
 - HP NC532m Dual Port Flex-10 10GbE BL-c Adapter
 - HP Emulex LPe1205 8Gb FC BL-c HBA (2-Port 8Gb Emulex FC HBA)
 - HP QMH 2562 8Gb FC BL-c HBA (2-Port 8Gb QLogic FC HBA)
 - HP Smart Array P711m/1G FBWC 6G SAS Controller
 - HP 4X QDR IB CX-2 Dual Port Mezz HCA for HP BladeSystem c-Class
 - HP NC364m 4-Port 1GbE BL-c Adapter
 - HP NC360m 2-Port 1GbE BL-c Adapter

USB Support:

- One (1) internal USB port on the BL860c i4
- Two (2) External USB ports on the BL860c i4 via SUV cable

• Management:

- o HP Integrity Server Blades Management Software
 - Integrity Integrated Lights-Out 3 (iLO 3) management processor
 - HP Insight Control
 - HP System Management Homepage
 - HP-UX 11i Management Software for Integrity Blades, www.hp.com/go/hpuxblades
 - HP Ignite-UX
 - HP Software Assistant (SWA)
 - HP Dynamic Root Disk (DRD)
- HP BladeSystem Infrastructure Management Software:
 - HP BladeSystem c-Class Onboard Administrator
 - HP BladeSystem c-Class Virtual Connect
- Enterprise Management Software
 - Data Protector Software
 - GlancePlus Pak



Overview

- Performance Manager and Agent
- Virtualization with HP Matrix OE www.hp.com/go/matrixoe
 - Advanced Infrastructure Management
 - HP Capacity Advisor (which includes HP Virtualization Manager))
 - HP Matrix OE infrastructure orchestration
 - HP Systems Insight Manager
 - Virtualization Continuum
 - HP-UX Virtual Partitions (vPars) v6.1
 - HP Integrity Virtual Machines (with HP-UX Guest OS's)
 - HP Process Resource Manager/pSets
 - HP-UX Containers
 - HP Matrix OE Matrix OE Reference Architectures

• Continuous Availability

- HP Serviceguard for HP-UX 11i
- HP Serviceguard Extensions for SAP
- HP Serviceguard Extensions for Oracle
- HP Continentalclusters

• Form Factor:

 HP Integrity BL860c i4 server blade is a full-height, BladeSystem c-Class form factor. The BL860c i4 server blade plugs into the BladeSystem enclosure. In the c7000 enclosure, 8 server blades are supported per 10U enclosure. 4 enclosures can be configured to a standard 42U rack; 32 BL860c i4 server blades can be configured in a fully populated rack. In the c3000 enclosure, 4 BL860c i4 server blades are supported per 6U enclosure.

• Enclosures:

- HP offers two different c-Class server blade enclosures to meet your individual needs:
 - The HP BladeSystem c7000 rack enclosure is 10U high and holds up to 8 HP Integrity BL860c i4 servers plugged vertically. Four (4) enclosures can be configured to a standard 42U rack
 - The HP BladeSystem c3000 rack enclosure is 6U high and holds up to 4 HP Integrity BL860c i4 servers plugged horizontally. Up to 7 enclosures can be configured to a standard 42U rack
 - The HP BladeSystem c3000 Enclosure targets three separate market segments:
 - Remote sites needing between 2 and 8 server blades
 - Mid-sized companies with between 3 and 100 servers in their company
 - Enterprise accounts with special datacenter requirement, such as DC power, or very limited rack power and cooling capacity.
- Server blades, storage blades, and interconnect modules are all designed to fit into the c7000 and c3000 enclosures.
- For additional enclosure information, please see: http://h18004.www1.hp.com/products/blades/components/enclosures/c-class/index.html.

• Warranty:

Protected by HP Services and a worldwide network of HP Authorized Channel Partners. Three-year parts, 3
 Year Labor and 3 Year on-site limited global warranty. Certain restrictions and exclusions apply. Hard drives have either a one year or three year warranty; refer to specific hard drive QuickSpecs for details



Standard Features

P	ro	c	25	s	0	r
		.,		-	v	

Octo-Core Processors

One of the following depending on Model

Intel® Itanium® 9560 2.53GHz/8-core/32MB/170W Processor Intel® Itanium® 9540 2.13GHz/8-core/24MB/170W Processor

Quad--Core Processor

Intel® Itanium® 9550 2.4GHz/4-core/32MB/170W Processor Intel® Itanium® 9520 1.73GHz/4-core/20MB/130W Processor

Upgradeability

Upgradeable to two (2) processors

NOTE: The HP Integrity BL860c i4 supports 1 or 2 processor configurations. Processors must be identical.

Cache Memory

One of the following depending on Model

L3 cache; up to 32MB, see processor specifics

Total 54 MB on-die cache

All Processors support

Single bit cache error correction 50 bit physical addressing 64 bit virtual addressing

Integrated memory controllers and Scalable Memory Interconnect (SMI)

Intel Instruction Replay Technology Enhanced instructions-level parallelism

Enhanced Intel Hyper Threading, with Dual-Domain Multi-Threading support

Intel Cache Safe Technology

Residual error protection for floating point operations

Thermal logic technologies

Dynamic CKE, for additional power savings with memory DIMMs

Chipset

Intel Boxboro

Memory

Type DDR3 registered memory modules (R-DIMMs)

Minimum 8 GB (2 x 4 GB DIMMs)

Maximum 384 GB (24 x 16 GB)

NOTE: Memory kits are DIMM pairs.

Network Adapter

Four (4) integrated HP NC553i 10Gb FlexFabric adapter ports supporting 10Gb/1Gb autosensing

Ethernet, FCoE, Flex-10, and TCP/IP offload engine

NOTE: FlexFabric capability requires OS drivers and the use of an HP Virtual Connect FlexFabric module.

Learn more at: www.hp.com/go/virtualconnect

NOTE: BL8x0c i4 server blades require Virtual Connect 3.70 or later

One (1) additional 10/100 NIC dedicated to Integrity iLO 3 Management

Up to twelve additional Gigabit Ethernet ports via the NC364m Quad-port mezzanine adapter or six additional 10 Gigabit Ethernet ports via the NC552m or the NC532m dual-port mezzanine adapters.

Expansion Slots

Three Mezzanine slots, two (2) Type II and one (1) Type I, PCIe x8 Gen2



Standard Features

Integrated Manageability	Integrity Integrated Lights-Out 3 (iLO 3)			
	Factory installed Integrity	y iLO 3 Advanced Pa	ack license	
	HP BladeSystem c-Class (Onboard Administr	ator	
	HP BladeSystem c-Class \	Virtual Connect		
Storage Controller	HP Smart Array p410i 3Gb SAS Controller		one to each HDD) RAID 0, and HBA mode options ad only 512MB Cache	
Maximum Internal Storage	Hot Plug SAS	1.8TB SAS	2 x 900GB SAS	
Graphics	Integrated ATI RN-50 128	30 x 1024 x 16M co	lor (128 MB DDR memory)	
	Resolution Color Depths	Depths 1280 x 10 1024 x 768, 16.7	024, 16.7M , 64k, 256,16	
		800 x 600, 16.7M		
		640 x 480, 16.7M	l, 64k, 256, 16	
FlexFabric Support	Four (4) ports via Two HP NC553i 10Gb 2-port FlexFabric Converged Network Adapters integrated on system motherboard Dual (2) ports via HP BLc NC553m Dual Port FlexFabric 10Gb Converged Network Adapter Dual (2) ports via HP BLc NC551m Dual Port FlexFabric 10Gb Converged Network Adapter			
	NOTE: BL8x0c i4 server b	lades require Virtu	al Connect 3.70 or later	
			cal Specifications and additional information and for HP-	
			products/quickspecs/13649_div/13649_div.html products/quickspecs/13737_div/13737_div.html	
			L UDI : ': DIOCO '45 DI L TI	
InfiniBand Support	Optional InfiniBand HCAs circuit board connects dir		he HP Integrity BL860c i4 Server Blade. The mezzanine blade system board.	
InfiniBand Support	circuit board connects dir	ectly to the server		
InfiniBand Support	circuit board connects dir HP 4X QDR InfiniBand Cor Features: Negotiates to DE Dual ports for re Support for HP-L Supported with I B21).	nnectX-2 Dual Port DR/QDR speeds dundant path conn UX 11i v3	blade system board. Mezzanine HCA for c-Class BladeSystem (PN 592519-B2 nections nd Switch Module for c-Class BladeSystem (PN 489184-	

Fibre Channel Support

Optional Fibre Channel HBAs are supported by the HP Integrity BL860c i4. The mezzanine circuit board connects directly to the server blade system board.

8Gb Fibre Channel Host Bus Adapters:

 QLogic QMH2562 8Gb Fibre Channel Host Bus Adapter for c-Class BladeSystem (PN 451871-B21)



Standard Features

 Emulex LPe1205 8Gb Fibre Channel Host Bus Adapter for c-Class BladeSystem (PN 456972-B21)

8Gb Fibre Channel HBAs feature:

- 8/4/2/1Gb/s auto negotiating speeds
- Dual ports for redundant path connections
- Optimized for HP Storage and supported by third party SAN vendors
- Support for HP-UX 11i v3

Compatible SAN

HP Integrity BL860c i4 server blades are optimized for HP Storage MSA, EVA, and XP products.

Smart Array Controller Support

Optional Smart Array Controller is supported by BL860c i4. The mezzanine circuit board connects directly to the server blade system board, and provides connection to off-blade SAS storage via a SAS interconnect switch module in the HP BladeSystem enclosure.

HP Smart Array P711m/1G FBWC 4-ports Ext PCIe x8 6G SAS Controller (PN 513778-B21)

- Provides support for HP Zoned Storage for BladeSystem
- Zoned Storage solution requires compatible HP Storage 600 Modular Disk System and HP Storage 3Gb SAS BL Switch
- Supports RAID 6 with Advanced Data Guarding (ADG)
- Provides support for HP P2000 G3 MSA
- Support for HP P2000 G3 MSA requires HP Storage 6Gb SAS BL Switch

NOTE: For additional details please see:

http://h18004.www1.hp.com/products/quickspecs/14035_div/14035_div.html

HP USB Options

External USB DVD drive with 6 ft USB extension cable is supported with c7000 enclosures.

The solution includes the following components:

- External USB DVD drive with 9-inch USB cable
- Power adaptor, power cable and USB Y-connector
- 6-foot USB extension cable

NOTE: The USB Y-connector goes between the extension cable and the 9-inch USB cable fixed with DVD drive.

NOTE: The Y-connector should NOT be placed between the server blade and the 6-foot Extension cable.

Integrity Server Blades Management Software and HP Integrity Essentials Software Plug-ins

HP-UX 11i Management Software for HP Integrity BL860c i4 Server Blade and HP BladeSystem

Getting Started

- HP Systems Insight Manager
- HP Insight Control for HP-UX 11i
- o HP-UX 11i System Management
- HP BladeSystem Integrated Manager in HP System Insight Manager
- o HP Onboard Administrator
- HP BladeSystem c-Class Onboard Administrator Firmware
- o HP BladeSystem c-Class Virtual Connect Firmware
- o HP Insight Control for HP-UX 11i v3 (Included in Base OE)

Deploy

- HP Ignite-UX
- o Software Distributor-UX
- Software Package Builder
- Dynamic Root Disk (DRD)
- Monitor



Standard Features

- **HP Systems Insight Manager**
- **HP System Management Homepage**
- Glance Plus Pak
- Performance Manager and Agent
- **HP Serviceguard Manager** 0

Control

- HP Integrity Integrated Lights-Out (iLO) 3 (standard with BL860c i4 servers)
- Integrity iLO 3 Advanced Pack license (included with BL860c i4 servers

Protect

- **HP-UX Bastille**
- **HP-UX Containers**
- **Data Protector Software**
- Software Assistant (SWA)

Optimize

- HP Capacity Advisory
- HP Global Workload Manager
- Process Resource Manager
- **HP Insight Power Manager**
- HP-UX 11i v3 power management 0

Provision

HP Matrix OE infrastructure orchestration

Integrate

- **HP Business Technology Optimization**
- IT Management Software
- HP Matrix OE for HP Integrity server blades

Learn More

For additional information on HP Integrity server blade management software please visit: http://h18004.www1.hp.com/products/servers/integrity -bl/c-class/860c/compmatrix.htm

Glossary of Integrity Server Blades **Management Software Product Description**

Manager in HP Systems Insight Manager

HP BladeSystem Integrated The HP BladeSystem Integrated Manager is a component in HP Systems Insight Manager (SIM) that provides streamlined management for the entire HP BladeSystem product family. The HP BladeSystem Integrated Manager enables users to guickly navigate their HP blade environments including blade servers, enclosure infrastructures, racks, and integrated switches, via automatically generated blade rack picture views and hierarchical trees. Users are able to conveniently configure, deploy, and manage individual or groups of blade systems. Additionally, users are able to quickly set up logical collections of blade systems for convenient management and control.

HP Blades Visualization

Used by System Administrators to identify, associate and group blades into collections, using tables, trees, and picture views, and it can also be used to monitor performance and launch Integrity Essentials.

NOTE: For more information about Manageability solutions for Integrity Servers go to: http://www.hp.com/go/integrityessentials

HP GlancePlus Pak

HP GlancePlus Pak provides you with a single product for managing a system's availability and performance. It is an integrated product that includes HP GlancePlus and HP OpenView Performance Agent. As an integrated product, the GlancePlus Pak includes the real-time diagnostic



Standard Features

capabilities of GlancePlus and the historical data collection capabilities of the Performance Agent. The performance agent is used with other availability and performance management products, thus providing an integrated real-time and historical performance management solution.

HP Ignite-UX for HP-UX Deployments

HP Ignite-UX is a free toolset that enables a network install of HP-UX onto multiple PA-RISC and/or Integrity servers on a network. It can also be used to create custom install configurations, or golden images, recover systems remotely, create custom recovery media including tape, CD and DVD, and manage and monitor multiple client installation sessions.

HP Capacity Advisor

The capacity planning component of HP Capacity Advisor offers the industry's first lightweight, integrated tool for ongoing capacity planning by simulating the placement of application workloads to help IT administrators improve server utilization. It captures real-world server utilization data to pre-test different scenarios before making changes to critical applications. HP Virtualization Manager, which is included with Capacity Advisor and Global Workload Manager, provides a central point of control that allows you to manage all the resources in your virtualized environment and a powerful way to connect IT resources to real business needs.

HP Integrity Integrated Lights-Out (iLO) 3 (factory integrated with BL860c i4) HP Integrity Integrated Lights-Out (iLO) management processors make it simpler, faster, and less costly to remotely manage your Integrity servers. HP iLO functions without additional software and can be accessed from any location via a web browser. HP Integrity systems with iLO 3 ships with a built in Advanced Pack License so your Integrity blade is instantly ready to use iLO Virtual Media and iLO power measurement. iLO Advanced features enabled in this release: Virtual Media, LDAP directory services, iLO power measurement, and integration with Insight Power Manager. No additional iLO licensing is needed.

NOTE: Please see www.hp.com/go/integrityilo for more information

HP Onboard Administrator

The Onboard Administrator for the HP BladeSystem enclosure is the brains of the new c-Class infrastructure. Together with the enclosure's HP Insight Display, the Onboard Administrator has been designed for both local and remote administration of HP BladeSystem c-Class. This module and its firmware provides:

- Wizards for simple, fast setup and configuration
- Highly available and secure access to the HP BladeSystem infrastructure
- Security roles for server, network, and storage administrators
- Automated power and cooling of the HP BladeSystem infrastructure
- Agent-less device health and status
- Thermal Logic power and cooling information and control

NOTE: Please see http://www.hp.com/go/onboardadministrator for more information.

HP Serviceguard Manager

HP Serviceguard Manager is a graphical user interface (GUI) that provides configuration, administration, and monitoring capabilities for Serviceguard, Serviceguard Extension for RAC, Metrocluster, and Continentalclusters. Using Serviceguard Manager, operators see color-coded icons that provide



Standard Features

a big-picture view of multiple clusters. From this big-picture view, operators can drill down and proactively manage clusters, systems (nodes), and packages that run applications.

HP Systems Insight Manager HP Systems Insight Manager (HP SIM) provides a unified, secure and extensible environment to centrally manage servers, storage and other infrastructure devices across multiple operating system platforms.

HP System Management Homepage HP System Management Homepage is a web-based interface that consolidates and simplifies the management of individual ProLiant and Integrity servers running Microsoft Windows or Linux operating systems, or HP 9000 and HP Integrity servers running HP-UX 11i. By aggregating data from HP Insight Management Agents and other management tools, the System Management Homepage provides a secure and intuitive interface to review in-depth hardware configuration and status data, performance metrics, system thresholds and software version control information. The System Management Homepage can also be used to access the HP Lights-Out Management processor on ProLiant and Integrity servers.

HP Matrix OE for HP Integrity servers

HP Matrix OE is advanced lifecycle management software for HP Integrity servers which enable you to instantly adjust to dynamic business demands - with the new addition of infrastructure orchestration, not only can you easily plan, configure, and automate your physical and virtual resources in the same way, but now you can also provision and modify a complex infrastructure in minutes.

HP-UX Software Assistant (SWA)

HP-UX Software Assistant (SWA) is a command-line based tool that consolidates and simplifies patch management and security bulletin management on HP-UX systems. The SWA tool is new for HP-UX releases as of January 2007, includes Security Patch Check (SPC), and is the HP-recommended utility to use to maintain currency with HP-published security bulletins for HP-UX software.

HP-UX Workload Manager

HP-UX Workload Manager (HP-UX WLM) is a resource management tool that provides automatic CPU resource allocation and application performance management based on your service-level objectives (SLOs) and business priorities. WLM is most effective managing applications that are CPU-bound. It automatically adapts system or partition CPU resources (cores) to the demands, SLOs, and priorities of the running applications. (A core is the actual data processing engine within a processor, where a single processor can have multiple cores, and a core can support multiple execution threads through Hyper-Threading, introduced with HP-UX 11i v3, as discussed below.) It adjusts the CPU allocation of a group of processes known as a workload, basing adjustment on the current needs and performance of the applications in that workload.

HP Global Workload Manager The workload management capability for HP-UX Integrity servers is provided by the HP Global Workload Manager component of HP Matrix OEInsight Dynamics -- Matrix OEVSE. HP Global Workload Manager (gWLM) is an intelligent policy engine that automatically allocates resources among multiple workloads to increase server utilization while meeting service levels for high-priority applications. Designed to work across multiple HP-UX 11i, OpenVMS and Linux environments, the workload management features are ideal for large, centralized IT environments that host

Standard Features

applications for many departments.

HP Matrix

HP Matrix OE capabilities let you provision infrastructure in minutes to automatically activate physical and virtual servers, storage, and networking from pools of shared resources. Whether you need a single virtual machine or infrastructure for a complex three-tier application, Matrix OE finds available resources, streamlines the approval process, and automatically provisions and configures what's needed across infrastructure silos. Delivering infrastructure to the business becomes faster, more efficient, and more reliable.

Performance Manager and Agent

HP Performance Manager, Agents, and Monitor combine to provide a powerful and flexible distributed management solution. This solution is a single interface for centrally monitoring, analyzing, and forecasting resource utilization for distributed multi-vendor environments, enabling you to offer the best possible level of service in a cost-effective manner.

Process Resource Manager HP Process Resource Manager (HP PRM) is a resource management tool used to control the amount of resources that processes use during peak system load. HP PRM can manage allocation of the following resources:

- CPU: Ensures a minimum allocation of CPU; can also simultaneously cap CPU resource usage for each group in the configuration. (Starting with HP-UX 11i v3, per-group capping is available.)
- Memory: Ensures a minimum allocation of private real memory; can also cap private memory usage. Allows you to allocate an exact amount of shared memory.
- Disk bandwidth: Ensures a minimum allocation of disk bandwidth

HP-UX Containers

One method that Matrix OE uses to improve server resource utilization is to consolidate multiple applications within a single operating system image. HP-UX Containers combine kernel level security and prove resource management to stack multiple applications within the same operating system. HP-UX Containers and HP-UX Workload Manager can dedicate specific resources to specific applications within an operating system image, avoiding resource contention issues. Using HP-UX Containers 11i v3 Security Containment, organizations can ensure that application instances cannot access processes or file from other applications or the system. This ensures that multiple application instances run securely in a consolidated environment, providing the benefits of consolidation while preserving the security of a scale out environment. For software licensing purposes, the maximum number of CPUs in HP-UX Containers can be capped. This capability is part of the HP-UX Base Operating Environment (BOE).

Software Distributor-UX

Software Distributor (SD) is the HP-UX administration tool set used to deliver and maintain HP-UX operating systems and layered software applications. SD is delivered as part of HP-UX; you do not need to download it separately.

OS Support

HP-UX 11i v3 Data Center Operating Environment (DC-OE) HP-UX 11i v3 Virtual Server Operating Environment (VSE-OE) HP-UX 11i v3 High Availability Operating Environment (HA-OE) HP-UX 11i v3 Base Operating Environment (BOE)



Standard Features

NOTE: For more complete and up to date information on HP-UX 11i support, please visit the HP-UX11i website at: http://www.hp.com/go/hpux

Supported Software Options

HP Matrix OE - Matrix OE for HP Integrity servers (included within both the VSE-OE and DC-OE), which includes the following capabilities for Integrity blades:

HP-UX Virtual Partitions (vPars) v6.1 HP Integrity Virtual Machines (VM)

HP Capacity Advisor

HP Global Workload Manager HP Integrity Online VM Migration HP Virtualization Manager

HP Serviceguard for HP-UX 11i
HP Serviceguard Manager

HP Serviceguard Extensions for SAP HP Serviceguard Extensions for Oracle HP Insight Control power management

GlancePlus Pak

Performance Manager and Agent

HA Monitors MirrorDisk/UX

Intelligent Manageability

HP Integrity Integrated Lights-Out 3 (iLO 3) Remote Management

Virtual serial console (Multiple, mirrored sessions, with previous context and console log buffer)

Virtual Media

Virtual Power Button Control LDAP Directory Services

iLO 3 power measurement and integration with Insight Power Manager

Embedded system health and Integrity fault management Diagnostics and troubleshooting:

- virtual front panel
- log access to Integrity System Event Log
- Forward Progress Log Blade power consumption reading

Dedicated LAN Connectivity

Automatic IP Configuration via DHCP/DNS/WINS browser

Command Line and scripted access Industry Standard RC4, 128-bit Secure Sockets Layer (SSL) and Secure Shell (SSH) Security

Directory Services Integration (LDAP)

Support for 19 user accounts with customizable access privileges

NOTE: iLO 3 Advanced Pack license is included with every BL860c i4 server blade

Availability

Dual-Port Fibre Channel Mezzanine Card for redundant SAN connection

Two hot-plug SAS hard drive bays and integrated RAID (HP Smart Array p410i) controller on every server blade

Network adapter teaming (network fault tolerance, transmit load balancing, switch-assisted load balancing) supported on integrated LOMs and with add-in Mezzanine cards.

- ECC protected DDR3 memory
- Memory double chip spare to overcome two DRAM chip failures
- Dynamic Processor resilience and deallocation with HP-UX



Standard Features

- Journal file system with HP-UX*
- Auto reboot
- HP Serviceguard for HP-UX*
- HP Serviceguard Extension for RAC for HP-UX*
- HP Serviceguard Extension for SAP for HP-UX*
- Serviceguard Manager for HP-UX Clusters*
- HP Event Monitoring Service
- HA Monitors for HP-UX
- HA Toolkits for HP-UX
- HP Mirrordisk/UX* (Included if purchase HP-UX 11i VSE-OE, HA-OE or DC-OE)
- Extended Campus Cluster*, HP Metrocluster*, and HP Continentalclusters* for HP UX
- HP System Insight Manager (SIM) for proactive fault management
- HP Serviceguard Storage Management Suites for HP-UX*

NOTE: *Fee based software products.

Industry Standard Compliance

- ACPI 2.0 Compliant
- PCIe 2.0 Compliant
- WOL Support
- USB 2.0 Support

Security

Hardware Security

- Administrator's password
- Integrity iLO 3 access control- 19 customizable local user accounts with assignable rights for power, console, configuration, etc.
- OA and Integrity iLO 3 Directory Services Integration (LDAP)
- Integrity iLO 3 access via SSL encryption or SSH
- Integrity iLO 3 access methods via web, SSH, etc. can be disabled
- SSL encryption on web console
- Trusted Platform Module (TPM) option for secure cryptographic key storage, integrates with HP-UX security features

Platform security fundamentals

For the past 25 years HP has been building one of the most trustworthy and secure UNIX operating systems on the market. Designed for the optimal protection against both external and internal threats. HP-UX 11i offers industry-leading breadth and depth of UNIX security features. Focused on comprehensive security integration aimed at proactively mitigating risk, reducing compliance cost and accelerating time to implementation, HP-UX security solutions significantly lower IT costs. This set of fully integrated and complementary features is designed to provide layered security with in-depth protection of all your enterprise assets by protecting all these aspects of data, systems, data and identity security. HP-UX independently validates its comprehensive security portfolio through Common Criteria security evaluations. For more details, visit: www.hp.com/go/hpux11isecurity

Protecting systems

One critical factor in enterprise security is system minimization and hardening. HP-UX 11i offers a set of security features designed to address known and unknown vulnerabilities by running only the services that are needed, thus minimizing a potential point of attack. The following security features have built-in mechanisms not only to minimize and harden the system, but also to detect and react to attack in real time:



Standard Features

- Bastille system hardening
- Host Intrusion Detection System
- Secure Resource Partitions
- IPFilter firewall technology
- Software Assistant (security bulletin currency)
- Install-time Security
- Boot Authentication
- Standard Mode Security Extensions
- Shadow Passwords
- Strong Random Number Generator

Protecting data

HP-UX 11i offers data protection in many forms: protecting data in transit, in use and at rest. By using security features designed to protect data in its three forms, HP-UX 11i customers can minimize possible breaches not only in terms of data loss, but in customer trust as well. Several security features offer data protection capabilities to HP-UX customers:

- Encrypted volume and file system
- Trusted Computing Services
- Security containment
- OpenSSL
- IPSec
- Secure Shell
- MD5sum

Protecting Identity:

In modern day global enterprise companies, managing identity is not an easy task, especially as identity management requirements grow to include employees, contractors, partners and suppliers across many countries with various privacy protection laws and regulation. HP-UX 11i dramatically simplifies this critical task by integrating various identity management technologies which offer ease of use and adherence to compliance regulation:

- Identity Management Integration
- Select Access for IdMI
- Role-based Access Control
- AAA Server
- HP Directory Server for HP-UX
- LDAP-UX Client
- Kerberos Server
- Kerberos Client Services
- PAM Kerberos

HP also offers many additional security features available through open source software for HP-UX.

Common Criteria certification

Many enterprise and government customers require this vendor-independent security certification because it increases confidence in the product's security assurance, functionality, quality and effectiveness. Many governments, including the United States, require certification for government IT procurement.

Certification evaluations are only conducted by the evaluation agency after release of the product. HP-



Standard Features

UX 11i v3, has been actively evaluated to the Common Criteria (CC) Security standards for many years. A history of our achievements include:

- February 2003: Certification of HP-UX 11i V1 achieves A CC to Evaluation Assurance Level 4
- May 2006: Certification of HP-UX 11i V2 to the current EAL4 Common Criteria
- May 2008: Certification of HP-UX 11iV3 achieved including hard partitions (nPars)
- December 2009: Certification of HP-UX 11iV3 to CCOPP profile including soft partitions (vPars)

Common Criteria certifications continue to be an integral part of our HP-UX comprehensive security portfolio. HP-UX 11i v3 has successfully completed a new Commercial off the Shelf (COTS) Compartmentalized Operations Protection Profile (CCOPP) evaluation. This new CCOPP evaluation encompasses the extensive range of security solution for HP-UX 11i v3 including soft partitioning or Virtual partitions (vPars) as well as the previously certified hard partitions (nPars).

Factory Express Portfolio for Servers and Storage

HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP Integrity Server Blades, HP ProLiant Server Blades, HP BladeSystem, HP 9000 servers as well as the MSA1xxx, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.

For more information on Factory Express services for your specific server model please contact your sales representative or go to: http://www.hp.com/go/factory-express.

HP Simple Configurator

SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact HP's Customer Business Center or an Authorized Partner for assistance. http://www.hp.com/products/configurator

Service and Support



Support Services

HP Technology Services for Integrity Servers

HP Technology Services delivers confidence, reduces risk and helps customers realize agility and stability. Connect to HP to help prevent problems and solve issues faster. Our support technology lets you to tap into the knowledge of millions of devices and thousands of experts to stay informed and in control, anywhere, any time.

Protect your business beyond warranty with HP Care Pack Services

HP Care Pack Services enable you to order the right service level, length of coverage and response time as you purchase your new server, giving you full entitlement for the term you select.

Recommended HP Care Pack Services for optimal satisfaction Integrity Servers:

Optimized Care

HP Proactive Care Advanced - 24x7 coverage, three year Care Pack Service

Achieve a higher return on your product investment with the personal attention from a locally assigned Account Support Manager who delivers recommendations designed to improve availability and performance. Leverage your system's ability to connect to HP for automated problem detection and rapid critical event management to increase stability and reduce unplanned downtime. This recommendation provides 24x7 coverage with four-hour response for hardware and two-hour callback for supported software. Collaborative call management comes with Proactive Care Advanced or you may choose full support from HP where we own all cases through to resolution. HP is a leading provider of support services for most operating systems used on HP BladeSystem with long, successful partnerships with vendors such as Microsoft, Red Hat, VMware, SUSE and others. Purchasing software support from HP simplifies troubleshooting and shortens time to resolution with one call for hardware or software questions.

http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=4AA5-3259ENW&cc=us&lc=en

Basic Care

HP Proactive Care with 24x7 coverage, three year Care Pack Service

HP Proactive Care helps prevent problems and stabilize IT by utilizing secure, real-time, predictive analytics and proactive consultations when your products are connected to HP. This Care Pack Service combines three years' proactive reporting and advice with our 24x7 coverage and enhanced escalation management, four hour hardware response time and two hour call back for software questions on leading industry standard software running on your HP ProLiant server.

http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA3-8855ENW.pdf

Related Services

HP Datacenter Care service

HP Datacenter Care helps you improve IT stability and security, increase the value of IT, and enable agility and innovation. It is a structured framework of repeatable, tested, and globally available services "building blocks." You can deploy, operate, and evolve your datacenter wherever you are on your IT journey. With HP Datacenter Care, you benefit from a personalized relationship with HP via a single point of accountability for HP and others' products. For more information, visit www.hp.com/services/datacentercare

HP ProLiant Server Hardware Installation

Provides for the basic hardware installation of HP branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner. http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN.pdf

Factory Express for Servers and storage

HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed. For more information on



Support Services

Factory Express services for your specific server model please contact your sales representative or go to: http://www.hp.com/go/factory-express.

Data Privacy Services

Protect your data through better media management. HP Data privacy services help manage and protect sensitive data to reduce the risk of unauthorized access to private information and help meet compliance requirements. Our retention services allow you to keep drives and other devices upon failure, our removal services provide convenient data sanitization and our recovery services allow you to safely retire IT assets and capture any remaining value from the hardware. www.hp.com/services/dataprivacy

Additional HP Care Pack services can be found at: http://www.hp.com/go/cpc

eSupport

Get connected to HP to improve your support experience

Prevent problems with innovative, automated monitoring tools and proactive services. Combining Proactive Care Services with our remote support technology such as Insight Online provides you with expert advice and personalized, cloud-based automated IT support, helping to prevent unplanned down time and solve problems quickly. For more information, visit: www.hp.com/qo/proactiveinsightexperience

HP Support Center

Personalized online support portal with access to information, tools and experts to support HP business products. Submit support cases online, chat with HP experts, access support resources or collaborate with peers. Learn more http://www.hp.com/go/hpsc

HP's Support Center Mobile App* allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime.

HP Insight Remote Support and HP Support Center are available at no additional cost with a HP warranty, HP Care Pack or HP contractual support agreement.

*HP' Support Center Mobile App is subject to local availability

Parts and Materials

HP will provide HP-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product quick-specs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by HP due to malfunction.



Models

HP Integrity BL860c i4 Base Model

HP Integrity BL860c i4

(2P) AM377A Processor(s)

Supports up to two (2) processors

Cache Memory

Two (2) processor sockets; processor modules are configured to order

Included with processors

Memory Twenty four (24) DIMM sockets; memory DIMMs are configured to order.

Network Adapter Four (4) integrated HP NC553i 10Gb FlexFabric adapter ports supporting

10Gb/1Gb autosensing Ethernet, FCoE, Flex-10, and TCP/IP offload engine **NOTE:** FlexFabric capability requires OS drivers and the use of an HP Virtual Connect FlexFabric module. Learn more at: www.hp.com/go/virtualconnect **NOTE:** BL8xOc i4 server blades require Virtual Connect 3.00 or later when

used in Virtual Connect configurations

Storage Controller One (1) additional 10/100 NIC dedicated to Integrity iLO 3 Management

Integrated HP Smart Array p410i SAS Controller

Embedded SSAS read only 512MB cache

Hard Drives Two SFF SAS drive bays; hard disk drives are configured to order

10 expansion Three PCIe mezzanine card slots (PCIe Gen2 x8 interface); mezzanine cards

are configured to order.

Optical Drive None internal to blade server

Integrity iLO 3 and Integrity iLO 3 Advance Pack license included.

Form Factor Up to 8 supported in HP BladeSystem c7000 Enclosure

Up to 4 supported in HP BladeSystem c3000 Enclosure



Configuration Information - Factory Integrated Models

NOTE: This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for information on CTO product offerings and requirements.

NOTE: HP does not allow factory integration of options into standard models listed above.

Configure-to-order servers must start with a CTO Chassis.

NOTE: FIO indicates that this option is a Factory Installable Option.

Step 1: Base Server Blade Configuration

HP Models HP Integrity BL860c i4 Server Blade

AM377A

NOTE: Adding Option code "#0D1" to the Server Blade PN will integrate the configured blade into the enclosure (which must be on the same order).

Configurable Model ships with:

Four (4) integrated HP NC553i 10Gb FlexFabric adapter ports supporting 10Gb/1Gb autosensing Ethernet, FCoE, Flex-10, and TCP/IP offload engine plus (1) additional

10/100 NIC dedicated to Integrity iLO 3 Management

Integrated HP Smart Array p410i SAS Controller for internal HDDs

Integrated SAS read only 512MB cache

Two small form factor (SFF) SAS hot plug hard drive bays

HP Integrity Integrated Lights-Out 3

Step 2: Choose Required Options (one of the following from each list unless otherwise noted):

HP Processors NOTE: Select minimum one (1) and maximum two (2) processors.

Octo-Core Processors

HP BL8x0c i4 Itanium 9540 (2.13GHz/8-core/24MB/170W) Processor Kit

HP BL8x0c i4 Itanium 9560 (3GHz/8-core/32MB/170W) Processor Kit

AM383A

AM382A

Quad-Core Processor

HP BL8x0c i4 Itanium 9520 (1.73GHz/4-core/20MB/130W) Processor Kit

AM385A

HP BL8x0c i4 Itanium 9550 (2.4GHz/4-core/32MB/170W) Processor Kit

AM384A

HP Memory NOTE: Select minimum one (1) (2x4GB DIMMs) memory kit per server, and maximum

of six (6) memory kits per server (12 memory kits if 2 processors ordered)

HP BL8x0c i4 8GB (2x4GB) Single Rank PC3L 10600 (DDR3-1333) Registered CAS-9 AM386A

Memory Kit

HP BL8x0c i4 16GB (2x8GB) Dual Rank PC3L 10600 (DDR3-1333) Registered CAS-9 AM387A

Memory Kit

HP BL8x0c i4 32GB (2x16GB) Dual Rank PC3L 10600 (DDR3-1333) Registered CAS-9

Memory Kit

NOTE: Memory kits consist of pairs of DIMMs. **NOTE:** DIMMs must be installed in pairs. **NOTE:** Minimum memory requirement is 8GB.



AM388A

Configuration Information - Factory Integrated Models

Step 3: Choose Additional Options for Factory Integration

HP Hard Drives	NOTE: Hard drives have either a one year or three year warranty; refer to specific hard
	drive QuickSpecs for details.

SAS Hot Plug SFF (2.5-inch) Enterprise (ENT) Drives

HP 1.2TB 12G SAS 10K rpm SFF (2.5-inch) Enterprise 3yr Warranty Hard Drive	785079-B21
HP 900GB 12G SAS 10K rpm SFF (2.5-inch) Enterprise 3yr Warranty Hard Drive	785075-B21
HP 600GB 12G SAS 10K rpm SFF (2.5-inch) Enterprise 3yr Warranty Hard Drive	785073-B21
HP 450GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	581284-B21
HP 300GB 12G SAS 15K rpm SFF (2.5-inch) Enterprise 3yr Warranty Hard Drive	785099-B21
HP 300GB 12G SAS 10K rpm SFF (2.5-inch) Enterprise 3yr Warranty Hard Drive	785071-B21
HP 450GB 12G SAS 15K rpm SFF (2.5-inch) Enterprise 3yr Warranty Hard Drive	785101-B21
HP 600GB 12G SAS 15K rpm SFF (2.5-inch) Enterprise 3yr Warranty Hard Drive	785103-B21
HP 146GB 6G SAS 15K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	512547-B21
NOTE: Though the disks are 6Gb/12Gb, implementation of the embedded HP Smart	

Array p SAS RAID controller limits performance of disks.

12G SAS Hot Plug Enterprise Performance Solid State Drives

HP 200GB 12G SAS Write intensive SFF 2.5-in 3yr Wty Solid State Drive	802576-B21
HP 400GB 12G SAS Write Intensive SFF 2.5-in 3yr Wty Solid State Drive	802580-B21

HP 800GB 12G SAS Write Intensive SFF 2.5-in 3yr Wty Solid State Drive 802584-B21 HP NC364m Quad Port 1GbE BL-c Adapter 447883-B21

HP Ethernet Mezzanine Options

NOTE: Provides four additional Gigabit Ethernet ports per I/O expansion slot. **NOTE:** BL860c i4 supports HP Virtual Connect Ethernet Interconnect Modules. See:

http://www.hp.com/go/bladesystem/virtualconnect for complete details. HP NC360m Dual Port 1GbE BL-c Adapter 445978-B21

NOTE: Provides two additional Gigabit Ethernet ports per I/O expansion slot.

HP NC552m 10Gb 2-port Flex-10 Ethernet Adapter NOTE: Provides Flex-10 connectivity when used in conjunction with the HP Virtual Connect Flex-10 10Gb Ethernet Module for the c-Class BladeSystem Option (P/N

455880-B21).

HP NC532m Dual Port 10GbE Multifunction BL-c Adapter NOTE: Provides Flex-10 connectivity when used in conjunction with the HP Virtual Connect Flex-10 10Gb Ethernet Module for the c-Class BladeSystem Option (P/N

455880-B21).

Options

HP FlexFabric Mezzanine HP NC553m 10Gb 2-port FlexFabric Adapter

NOTE: Provides Ethernet and FCoE connectivity when used in conjunction with HP Virtual

Connect FlexFabric 10Gb/24-Port Module (PN 571956-B21).

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

HP NC551m:

http://h18004.www1.hp.com/products/quickspecs/13649 div/13649 div.html

HP NC553m:

http://h18004.www1.hp.com/products/quickspecs/13737 div/13737 div.html

HP Virtual Connect FlexFabric Module

http://h18004.www1.hp.com/products/quickspecs/13652_div/13652_div.html



610609-B21

467799-B21

613431-B21

Configuration Information - Factory Integrated Models

HP Fibre ChannelQLogic QMH2562 8Gb Fibre Channel Host Bus Adapter for c-Class BladeSystem451871-B21**Mezzanine Options**Emulex LPe1205 8Gb Fibre Channel Host Bus Adapter for c-Class BladeSystem456972-B21

NOTE: BL860c i4 supports HP Virtual Connect Fibre Channel Interconnect Modules. See:

http://www.hp.com/go/bladesystem/virtualconnect for complete details.

HP Infiniband Mezzanine HP 4X QDR InfiniBand ConnectX-2 Dual Port Mezzanine HCA for c-Class BladeSystem

Options

NOTE: Provides DDR/QDR InfiniBand connectivity when used in conjunction with HP BLc

4X QDR IB Switch for HP BladeSystem c-Class (PN 489184-B21). **NOTE:** For more support details, please visit the following web-page: http://www.hp.com/products1/serverconnectivity/adapters/infiniband/

specifications.html

HP Security - TPM HP Integrity BL8x0c i4 Trusted Platform Module

NOTE: The TPM must be installed by the factory.

AM392A

592519-B21

Step 4: Choose Additional Options for Field Upgrades

NOTE: For additional options, please refer to the "Core Options" and "Additional Options" section below. For additional options, including server blade enclosures interconnect, mezzanine options and power subsystem options; please see the Core Options and Additional sections below; or the following:

HP BladeSystem c-Class Enclosures QuickSpecs:

HP BladeSystem c3000 Enclosure QuickSpecs:

http://h18000.www1.hp.com/products/quickspecs/12790_div/12790_div.html

HP BladeSystem c7000 Enclosure QuickSpecs:

http://h18000.www1.hp.com/products/quickspecs/12810_div/12810_div.html

and HP BladeSystem c-Class Interconnect and Mezzanine Components:

http://h18004.www1.hp.com/products/blades/components/c-class-interconnects.html http://h18004.www1.hp.com/products/blades/components/c-class-adapters.html



Core Options

HP Ethernet Mezzanine Options	HP NC364m Quad Port 1GbE BL-c Adapter NOTE: Provides four additional Gigabit Ethernet ports per each I/O expansion slot.	447883-B21
	HP NC360m Dual Port 1GbE BL-c Adapter NOTE: Provides two additional Gigabit Ethernet ports per each I/O expansion slot.	445978-B21
	HP NC552m 10Gb 2-port Flex-10 Ethernet Adapter NOTE: Provides Flex-10 connectivity when used in conjunction with the HP Virtual Connect Flex-10 10Gb Ethernet Module for the c-Class BladeSystem Option (P/N 455880-B21).	610609-B21
	HP NC532m Dual Port 10GbE Multifunction BL-c Adapter NOTE: Provides Flex-10 connectivity when used in conjunction with the Provides Flex- 10 connectivity when used in conjunction with the HP Virtual Connect Flex-10 10Gb Ethernet Module for the c-Class BladeSystem Option (P/N 455880-B21).	467799-B21
HP FlexFabric Mezzanine Options	HP NC553m 10Gb 2-port FlexFabric Adapter NOTE: Provides Ethernet and FCoE connectivity when used in conjunction with HP Virtual Connect FlexFabric 10Gb/24-Port Module (PN 571956-B21).	613431-B21
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information: HP NC551m: http://h18004.www1.hp.com/products/quickspecs/13649_div/13649_div.html HP NC553m: http://h18004.www1.hp.com/products/quickspecs/13737_div/13737_div.html HP Virtual Connect FlexFabric Module	
	http://h18004.www1.hp.com/products/quickspecs/13652_div/13652_div.html	
HP Fiber Channel Mezzanine Options	Emulex LPe1205 8Gb Fibre Channel Host Bus Adapter for c-Class BladeSystem QLogic QMH2562 8Gb Fibre Channel Host Bus Adapter for c-Class BladeSystem	456972-B21 451871-B21
HP Processors	Octo-Core Processors HP BL8x0c i4 Itanium 9540 (2.13GHz/8-core/24MB/170W) Processor Kit HP BL8x0c i4 Itanium 9560 (3GHz/8-core/32MB/170W) Processor Kit Quad-Core Processor HP BL8x0c i4 Itanium 9520 (1.73GHz/4-core/20MB/130W) Processor Kit HP BL8x0c i4 Itanium 9550 (2.4GHz/4-core/32MB/170W) Processor Kit	AM383A AM382A AM385A AM384A
	NOTE: HP Integrity BL860c i4 processor upgrade kits contain one processor. Processors in a given server blade must be identical. No mixing of processor models is	
	allowed. NOTE: HP Integrity BL860c i4 only supports 1 or 2 processor configurations.	
HP Memory	NOTE: HP Integrity BL860c i4 only supports 1 or 2 processor configurations. HP BL8x0c i4 8GB (2x4GB) Single Rank PC3L 10600 (DDR3-1333) Registered CAS-9	AM386A
HP Memory	NOTE: HP Integrity BL860c i4 only supports 1 or 2 processor configurations. HP BL8x0c i4 8GB (2x4GB) Single Rank PC3L 10600 (DDR3-1333) Registered CAS-9 Memory Kit HP BL8x0c i4 16GB (2x8GB) Dual Rank PC3L 10600 (DDR3-1333) Registered CAS-9	AM386A AM387A
HP Memory	NOTE: HP Integrity BL860c i4 only supports 1 or 2 processor configurations. HP BL8x0c i4 8GB (2x4GB) Single Rank PC3L 10600 (DDR3-1333) Registered CAS-9 Memory Kit	



Core Options

NOTE: DIMMs must be installed in decreasing capacity with the largest DIMMs installed in the lowest numbered slots.

HP Hard Drives

NOTE: Hard drives have either a one year or three year warranty; refer to specific hard drive QuickSpecs for details.

SAS Hot Plug SFF (2.5-inch) Enterprise (ENT) Drives

HP 1.2TB 12G SAS 10K rpm SFF (2.5-inch) Enterprise 3yr Warranty Hard Drive	785079-B21
HP 900GB 12G SAS 10K rpm SFF (2.5-inch) Enterprise 3yr Warranty Hard Drive	785075-B21
HP 600GB 12G SAS 10K rpm SFF (2.5-inch) Enterprise 3yr Warranty Hard Drive	785073-B21
HP 450GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard	581284-B21
Drive	
HP 300GB 12G SAS 15K rpm SFF (2.5-inch) Enterprise 3yr Warranty Hard Drive	785099-B21
HP 450GB 12G SAS 15K rpm SFF (2.5-inch) Enterprise 3yr Warranty Hard Drive	785101-B21
HP 600GB 12G SAS 15K rpm SFF (2.5-inch) Enterprise 3yr Warranty Hard Drive	785103-B21
HP 300GB 12G SAS 10K rpm SFF (2.5-inch) Enterprise 3yr Warranty Hard Drive	785071-B21
HP 146GB 6G SAS 15K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard	512547-B21
Drive	

NOTE: Though the disks are 6Gb/12Gb, implementation of the embedded HP SAS RAID controller limits performance of disks

NOTE: Please see the QuickSpecs for Technical Specifications and additional information related to HDDs:

http://h18000.www1.hp.com/products/quickspecs/12244_div/12244_div.html (Worldwide)

12G SAS Hot Plug Enterprise Performance Solid State Drives

HP 200GB 12G SAS Write Intensive SFF 2.5-in 3yr Wty Solid State Drive	802576-B21
HP 400GB 12G SAS Write Intensive SFF 2.5-in 3yr Wty Solid State Drive	802580-B21

HP 800GB 12G SAS Write Intensive SFF 2.5-in 3yr Wty Solid State Drive

NOTE: Please see the QuickSpecs for Technical Specifications and additional information related to HDDs:

http://h18000.www1.hp.com/products/quickspecs/14038_div/14038_div.html (Worldwide)



802584-B21

Additional Options

HP Smart Array Controller	HP Smart Array P711m/1G 6Gb FBWC 4-ports Ext Mezzanine SAS Controller NOTE: The P711m will function as a SAS RAID controller when connected to MDS600 disk subsystem via the HP BLc 6Gb SAS Switch. In the RAID mode, HP-UX 11i v3 is supported. NOTE: The P711m will function as a Pass-Thru when connected to the HP P2000G3 SAS Storage Array via the HP BLc 6Gb SAS Switch. In the Pass-Thru mode, HP-UX 11i v3 is supported. For more details please see QuickSpecs: http://h18004.www1.hp.com/products/quickspecs/14035_div/14035_div.html	513778-B21
HP Infiniband Mezzanine Options	HP 4X QDR InfiniBand ConnectX-2 Dual Port Mezzanine HCA for c-Class BladeSystem NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/12586_div/12586_div.html	592519-B21
HP Ethernet Interconnects	HP Virtual Connect FlexFabric 10Gb/24-port Module for c-Class BladeSystem NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/13652_div/13652_div.html	571956-B21
HP Storage Blades	HP D2200sb PCIe Storage Blade NOTE: Please see QuickSpecs for Technical Specifications and additional options at: http://h18004.www1.hp.com/products/quickspecs/13714_div/13714_div.html	AP880A
HP USB Options	HP Integrity USB External DVD/RW Drive NOTE: The HP Integrity USB External DVD-RW drive solution includes the External DVD drive (AT120B) with 9 inch USB cable, power adaptor, power cable and Y-connector and 6-foot USB extension cable. NOTE: The USB Y-connector goes between the extension cable and the 9-inch USB cable fixed with DVD drive. NOTE: The Y-connector should NOT be placed between the server blade and the 6-foot Extension cable.	AT120B
HP Care Pack Services	HP offers a range of support services and additional services. For a complete listing of services, see: HP.com external site: http://www.hp.com/services/bladesystemservices HP Critical Service HP CP 1Y Critical Service HP CP 3Y Critical Service	HA112A1 HA112A3
	Installation Services HP CP Installation	HA113A1
	NOTE: For more information: http://www.hp.com/services/bladesystemservices	



Memory

DIMM installation guidelines:

- 1. All DIMMs must be DDR3 registered memory modules (R-DIMMs)
- 2. Both DIMM slots in a memory bank must be populated. A memory bank in this case is identical with a memory pair. A PCU will drive banks A through F.
- 3. Banks must be populated in sequential Alphabetic order, starting with bank A for CPU0, followed by bank A for CPU1, etc.
- 4. Both DIMMs in a memory bank must be identical.
- 5. DIMMs must be installed in decreasing capacity with the largest DIMMs installed in the smallest numbered DIMM slot.

HP Integrity BL860c i4 Server Blade

Standard Memory

8 GB Registered PCL3-10600 DDR3 1333MHz ECC DIMMs (2 x 4 GB)

Memory Bus Bandwidth: 6.4GT/s

Standard Memory Plus Optional Memory

Up to 384GB of DDR3 registered memory is available.

Fο	llowing	are memory	options	availab	le trom	HP:
----	---------	------------	---------	---------	---------	-----

HP Memory	HP BL8x0c i4 8GB (2x4GB) Single Rank PC3L 10600 (DDR3-1333) Registered CAS-9 Memory Kit	AM386A
	HP BL8x0c i4 16GB (2x8GB) Dual Rank PC3L 10600 (DDR3-1333) Registered CAS-9	AM387A

HP BL8x0c i4 16GB (2x8GB) Dual Rank PC3L 10600 (DDR3-1333) Registered CAS-9 Memory Kit

Memory Kit

HP BL8x0c i4 32GB (2x16GB) Dual Rank PC3L 10600 (DDR3-1333) Registered CAS-9 AM388A

Memory Kit

The following memory options are also supported as field upgrades (no factory

installation)

HP Integrity BL8x0c i2 8GB (2x4GB) PC3-10600 Registered CAS 9 Memory Kit

HP Integrity BL8x0c i2 16GB (2x8GB) PC3-10600 Registered CAS 9 Memory Kit

AM327A

AM328A


NOTE: Must be installed in pairs.

NOTE: DIMMs must be installed in decreasing capacity with the largest DIMMs in the

smallest numbered slots.



Storage



1 2 x SFF SAS Hot Plug Hard Drives

Hard Drives

SAS Hot Plug SFF Enterprise (ENT) Drives

NOTE: Hard drives have either a one year or three year warranty; refer to specific hard drive QuickSpecs for details.

	Quantity Supported	Position Supported	Controller
	2	1-2	HP Smart Array P410i Controller
1.2TB 12G 10K SFF			
900GB 12G 10K SFF			
600GB 12G 10K SFF			
450GB 6G 10K SFF			
300GB 12G 10K SFF			
300GB 12G 15K SFF			
450GB 12G 15K SFF			
600GB 12G 15K SFF			
146GB 6G 15K SFF			

6G SAS Hot Plug Enterprise Performance Solid State Drives

NOTE: Hard drives have either a one year or three year warranty; refer to specific hard drive QuickSpecs for details.

	Quantity Supported	Position Supported	Controller
200GB/400GB/800GB 12G SLC SFF	2	1-2	HP Smart Array P410i Controller



Power Specifications

NOTE: The HP Power Advisor is a tool provided by Hewlett-Packard to assist in the estimation of power consumption and proper selection of components including power supplies at a system, rack, and multi-rack level. A variety of additional features are also provided including a condensed bill of materials, a cost of owner ship calculator, and a power report. For additional information please visit: HP Power Advisor: http://h18004.www1.hp.com/products/solutions/power/index.html



Technical Specifications

System Unit	Dimensions	Height	14.42 in (36.63 cm)	
		Depth	19.1 in (48.51 cm)	
		Width	2.025 in (5.14 cm)	
	Shipping Dimensions	Height	21.50 in (54.61 cm)	
		Depth	26.0 in (66.04 cm)	
		Width	10.00 in (25.4 cm)	
	Weight	Maximum	25.0 lbs (11.3 kg)	
	Temperature Range*	Operating	10° to 35° C (50° to 95° F)	
		Non-Operating	-40° to 60° C (-40° to 140° F)	
		Storage	-20° to 60° C (-4° to 140° F)	
		Maximum Wet Bulb Temperature	30° C (86° F)	
	Relative Humidity**	Operating	15% to 80% RH non-condensing	
		Shipping	5% to 95% RH non-condensing	
		Storage	5% to 95% RH non-condensing	
	* All temperature ratings shown are for sea level. An altitude derating of 1°C per 304.8 m (1.8°F per 1,000 ft) to 3048 m (10,000 ft) is applicable. No direct sunlight allowed. Upper operating limit is 3,048m (10,000 ft) or 70 Kpa/10.1 psia. Upper non-operating limit is 9,144 m (30,000 ft) or 30.3 KPa/4.4 psia. ** Storage maximum humidity of 90% is based on a maximum temperature of 45°C (113°F). Altitude maximum for storage corresponds to a pressure minimum of 70 KPa.			
Embedded SAS RAID HP Smart Array p410i	Disk Drive and Enclosure Interface	3Gb SAS (Serial Attached SCSI)		
Controller	SAS Connectors	2 internal (SFF8484) x4 wide part connectors		
	Cache Memory Speed	DDR2-800 memory provides up to 4.2 GB/s maximum bandwidth		
	Server Interface	X1 5.0Gbps PCIe provides 1GB/s maximum bandwidth.		
	SAS Speed	Two x1 3G SAS provide 600MB/s maximum bandwidth.		
	Cache Memory	Embedded SAS read only 512MB.		
	Logical Drives Supported	Up to 2 logical volumes		
	Maximum Logical Drive Capacity	Up to 64 logical		
	Host Memory Addressing	64-bit, supporting greater than 4GB server memory space		
	RAID Support	RAID 0 (Striping), RAID 1 (mirroring), and 1+0 (Mirrored and Striped) (not supported with BL8x0c i4 blades)		

Upgradeable Firmware with Recovery ROM features

Upgradeable Firmware

Technical Specifications

Online Drive Flash requires 256MB, 512MB, or 1GB cache module

Embedded NC553i 10 Gb Network Interface 2-port FlexFabric NICs with Flex-10 support

Compatibility

Values)

Data Transfer Method Network Transfer Rate (Theoretical Maximum

1000Base-Sx

IEEE 802.ip QoS 802.3x flow control, and 802.3ap 10GBase-KR PCI Express, four lanes (x4)

1Dual 10Gb parts offer up to 40Gb/s bidirectional theoretical throughput

Environment-friendly Products and Approach **End-of-life Management** and Recycling

Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: http://www.hp.com/go/green. To recycle your product, please go to: http://www.hp.com/go/green or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: http://www.hp.com/go/green. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

Regulatory Compliance

Regulatory Model Number RSVLA-BC11

Electromagnetic Interference

Complies with FCC Rules and Regulations, Part 15, as a Class A digital device. Manufacturer's Declaration to EN55022 Class A, VCCI Registered. Class A, KC (Korea Certification), BMSI Taiwan, CSA Certified, compliant

with IEC 60950, UL 60950, EN 60950 and EN41003

Safety

UL Listed, CSA Certified, TUV GS Mark compliant with EN 60950 and EN

41003

More detailed regulatory

documents and certifications

http://docs.hp.com/en/hw.html



Summary of Changes

Date	Version History	Action	Description of Change:
01-Jun-2015	From Version 6 to 7	Added	Skus added in onfiguration Information - Factory Integrated
			Models and Core options:
			• 802576-B21
			• 802580-B21
			• 802584-B21
		Removed	Skus removed in configuration Information - Factory
			Integrated Models and Core options:
			• 632492-B21
			• 632494-B21
30-Mar-2015	From Version 5 to 6	Changed	Configuration Information - Factory integrated models and
			Storage sections were updated
			Skus Added:
			• 785079-B21
			• 785075-B21
			• 785073-B21
			• 785099-B21
			• 785101-B21
			• 785103-B21
			• 785071-B21
			Skus deleted:
			• 718160-B21
			• 619291-B21
			• 581286-B21
			• 627117-B21
			• 507127-B21
01-Dec-2014	From Version 4 to 5	Changed	Overview, Standard Features, Configuration Information -
01-060-2014	FIUIII VEISIUII 4 LU 5	Changeu	Factory Integrated Models and Memory sections were
			updated
		Added	Technology Services for Integrity Servers and Protect your
		naaca	business beyond warranty with HP Care Pack Services
			sections were added to Support Services
		Removed	Obsolete skus deleted from Core Options:
		1.0	• 580151-B21
			• 580151-B21
			• 411243-B21
			• BS580A
			• AQ697A
18-Apr-2014	From Version 3 to 4	Changed	Service and Support and Basic Care were revised.
10-Dec-2013	From Version 2 to 3	Added	HP 1.2TB 6G SAS 10K rpm SFF Dual Port Enterprise 3yr
10-066-2013	ו ו טווו עכו אטוו ב נט א	Auueu	Warranty Hard Drive was added to Hard Drives.
25-Mar-2014	From Version 1 to 2	Changed	Updated the following Sections
23-11101-2014	ווטווו עכו אוטוו ו נט ב	Changeu	Overview Section- Verbiage Updated
			Standard Features- Verbiage Updated
			Models- Verbiage Updated
			Configuration Information - Verbiage Updated
			Comiguration information - verblage opuated



Summary of Changes

© Copyright 2015 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel, the Intel logo, Xeon and Xeon Inside are trademarks of Intel Corporation in the U.S. and other countries.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less.

